




# LOUDSPEAKERS



**Z**

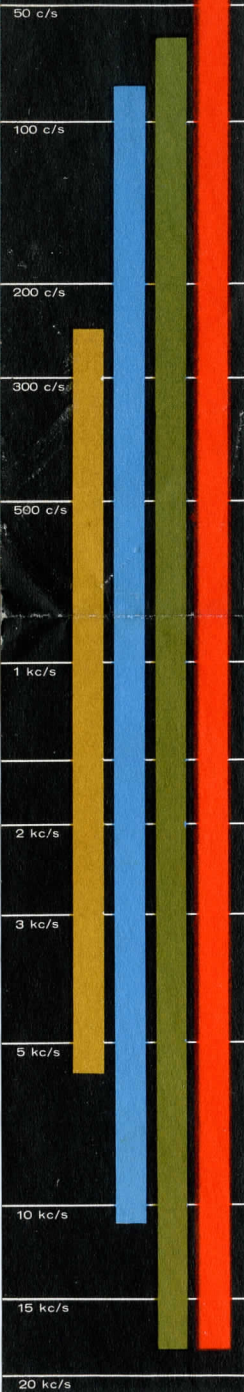



AD 2209 SZ AD 2400 Z AD 3414 Z

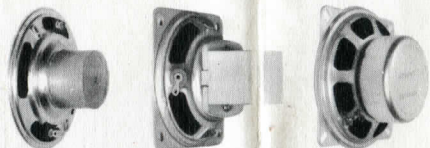


**X**

AD 3464 X  
AD 3574 X

AD 3514 X  
AD 3714 X  
AD 3814 X

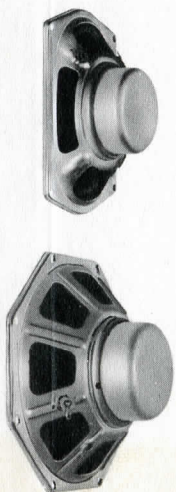

AD 3460 M/06  
AD 3690 M/06



AD 3500 M/06  
AD 3700 M/06  
AD 3800 M/06



**M**


**M**



AD 4200 M  
AD 5200 M

9710 M-01

AD 4000 M

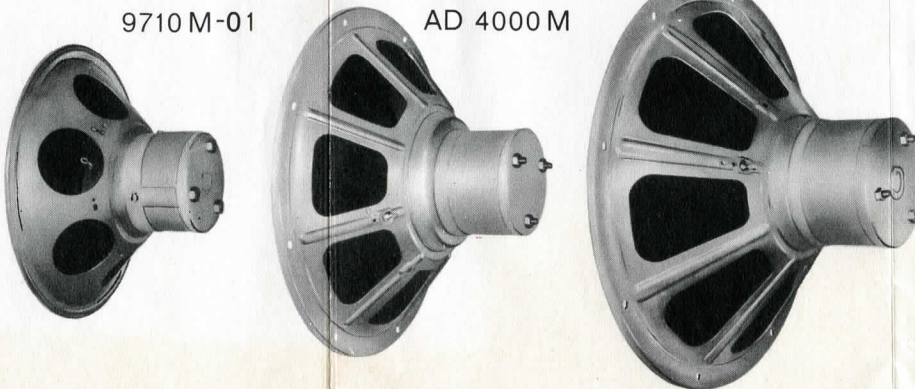

diam.	type number	voice coil impedance	max. handling capacity	reson. freq.	frequency range	flux density	total magnetic flux	magnetic energy in air gap	total weight	dimensions		
										total depth (a)	overall width (b)	fixation diameter (c)
inch		ohm	watt	c/s	c/s	gauss	maxwell	mW sec	grams	mm	mm	mm
2 1/4	AD 2209 SZ	8	0,5	420	400 - 5000	7100	11500	-	55	23	58	-
3	AD 1300 -06	3	2	230	200 - 18000	6800	9500	19,7	130	43	80	92
	AD 2300 CZ-06	150	2	275	240 - 7000	8500	15800	41,2	230	55	80	92
4	AD 1400 -06	3	3	165	140 - 16500	6800	9500	19,7	160	50	105	119
	AD 2400 -06	3	3	170	140 - 16500	8500	15800	41,2	260	62	105	119
	ADZ 2400 Z-06	3	3	205	160 - 5500	8500	15800	41,2	260	62	105	119
5	AD 3414 Z	3	3	165	170 - 7000	12000	22300	82	400	42	105	119
	AD 1500 -06	3	3	130	100 - 14000	6800	9500	19,7	150	53	121	119
	AD 2500 X-06	3	6	130	100 - 11000	8500	15800	41,2	250	64	121	119
	AD 3500 M-06	5	3	124	95 - 19000	9500	28000	82	400	71	121	119
7	AD 3514 X	5	6	130	100 - 11000	9500	28200	82	445	55	121	119
	AD 1700 -06	3	3	90	75 - 14000	6800	9500	19,7	190	62	155	156
	AD 2700 X-06	5	6	110	80 - 11000	8500	15200	39,4	290	73	155	156
	AD 3700 M-06	5	3	85	70 - 18000	9500	28000	82	440	81	155	156
	AD 3714 X	5	6	110	80 - 11000	9500	28000	82	475	65	155	156
	AD 3700 AM-06	800	3	85	70 - 18000	9500	28000	82	440	81	155	156
	AD 2800 M-06	5	6	72	60 - 18000	8500	15200	39,4	370	83	192	194
8	AD 3800 M-06	5	6	72	60 - 18000	9500	28000	82	520	91	192	194
	AD 3814 X	5	6	95	70 - 10000	9500	28200	82	535	75	192	194
	AD 4800 M	5	6	60	55 - 18000	13000	58300	302	1500	120	192	194
	9710M-01	7	10	50	40 - 19000	8000	97600	308	1800	116	216	226
10	AD 4000 M	7	10	50	45 - 18000	8000	98000	308	1770	130	262	244
	AD 4201 M	5	10	45	40 - 18000	9500	42600	161	850	125	315	294
	AD 4200 M	7	20	45	35 - 17000	8000	98000	308	1800	148	315	294
12	AD 5200 M	7	20	45	35 - 17000	11000	134000	582	3500	157	315	294
	AD 2460 X-06	5	6	130	110 - 11000	8500	15200	39,4	290	63	155 x 103	177,5 x 92
4 x 6	AD 3460 M-06	5	3	124	105 - 18000	9500	28000	82	440	71	155 x 103	177,5 x 92
	AD 3464 X	5	6	130	110 - 11000	9500	28000	82	480	55	155 x 103	177,5 x 92
5 x 7	AD 3574 X	5	3	110	100 - 8000	9500	28000	82	520	66	183 x 133	110 x 110
6 x 9	AD 3690 M-06	5	6	77	65 - 18000	9500	28000	82	525	91	234 x 161	167 x 117,5

